

Who said all  
**masking tapes**  
are the same?



## Scapa 2595

speciality masking tape

Scapa 2595 is specifically designed for high temperature masking applications where high curing temperatures are required, making it ideal for use in paint stoving cycles targeted for use within the powder coating and finishing industries



Operational  
up  
to **200°C**



2595 Masking Tape




# Scapa 2595

Product Reference	Product Description	Key Benefits & Features	Operating Temperature	Total Thickness (mm)
2595	A high temperature, cream, semi crepe paper silicone masking tape ideal for use in paint stoving cycles.	Excellent adhesion to a wide variety of substrates. Highly conformable and easy to remove.	Typical cycles at 180°C for 30 minutes each, 200°C for short term exposures.	0.150

## Features and benefits

- Excellent tolerance under very high temperatures up to 180°C, 200°C for short term exposures
- Highly conformable and flexible for all your intricate masking requirements
- Easily removed in one piece with no residue left behind
- High tack and shear strength ensures a good bond
- Excellent adhesion to a wide variety of substrates, including metals such as polished and anodised aluminum, chemically etched steel, passivated cadmium, magnesium, various types of copper containing alloys and brass

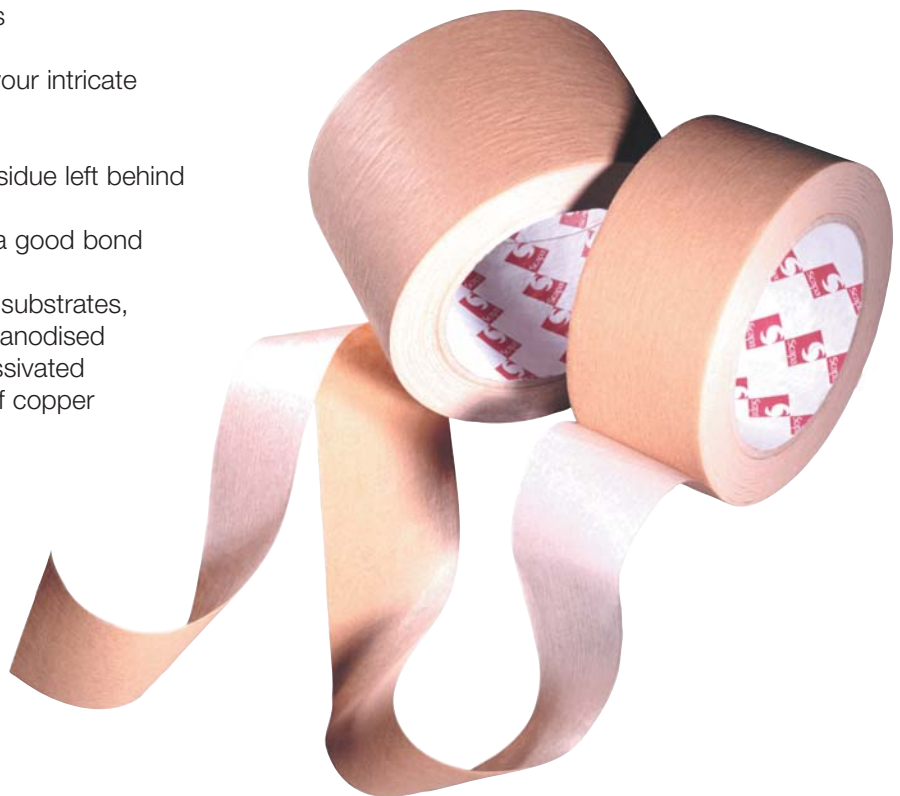

For further information, please contact your local distributor or Scapa customer support:

Tel: + 44 (0) 870 871 3131  
 Fax: + 44 (0) 161 301 7445

Email: [sales@scapa.com](mailto:sales@scapa.com)  
[www.scapaeurope.com](http://www.scapaeurope.com)

